



STYLE  
5000

---

WEAVING  
EXCELLENCE  
WITH  
INNOVATION



		SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
Code	Color	TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
STYLE 5000							
P60	Bamboo/Birch	21	59	20	18	0.34	0.24
Q43	Marble/Sand	9	48	43	9	0.37	0.26
Q46	Bamboo/Wheat	19	29	52	16	0.50	0.32
Q47	Moire/Mocha	17	23	60	15	0.53	0.33
Q49	Rattan/Umber	18	27	55	12	0.51	0.32
Q50	Bark/Tiger Oak	17	24	59	16	0.52	0.33
Q51	Wicker/Mushroom	15	24	61	11	0.52	0.33
Q53	Honeycomb/ Brown Sugar	19	26	55	15	0.52	0.33
Q61	Bark/Ash	8	29	63	11	0.48	0.31
Q62	Bark/Pewter	11	35	54	13	0.45	0.30
Q63	Linen/Pearl	36	50	14	33	0.42	0.28
Q64	Linen/Taupe	22	39	39	20	0.45	0.30
Q65	Linen/Clay	23	32	45	23	0.50	0.31
Q66	Metro/Platinum	29	31	40	28	0.51	0.32
Q94	Tweed/Oatmeal	11	34	55	10	0.46	0.30
Q95	Tweed/Buckeye	9	28	63	9	0.49	0.31
Q96	Thatch/Wheatgrass	11	26	63	11	0.50	0.32
R11	Linen/Cranberry	7	17	76	8	0.54	0.34
R12	Linen/Cinnamon	6	20	74	8	0.52	0.33
R85	Jute/Parchment	13	70	17	10	0.26	0.21
R86	Jute/Flax	30	56	14	27	0.37	0.26
R87	Jute/Latte	24	50	26	21	0.40	0.27
R88	Jute/Coffee	5	15	80	5	0.55	0.35
R89	Chenille/Marshmallow	16	67	17	15	0.29	0.22
R90	Chenille/Pearl	32	53	15	29	0.40	0.27
R91	Chenille/Honey	26	47	27	24	0.42	0.28
R92	Chenille/Driftwood	12	26	62	14	0.50	0.32
R93	Wicker/Straw	14	48	38	13	0.39	0.27
R95	Bark/Sienna	6	16	78	6	0.55	0.34
U10	Linen/Topaz	11	24	65	10	0.51	0.33
U11	Linen/Burlap	10	30	60	9	0.48	0.31
U12	Linen/Cream	22	46	31	21	0.42	0.28
U16	Crepe/ Toasted Coconut	24	40	36	25	0.45	0.31
U24	Seaglass/Silver	33	27	40	37	0.54	0.34
U28	Seaglass/Chardonnay	40	43	17	41	0.47	0.30
U29	Seaglass/Crystal	44	49	7	45	0.44	0.29
V88	Linen/Fig	6	15	79	8	0.55	0.35

Original artwork and original designs are protected under U.S. copyright laws. The samples attached to this notice fall under the federal statute and are therefore protected. Slight changes in the color combinations or weave pattern do not remove your legal obligation. If you would like further information regarding the copyright status of a pattern, please call the market manager representative at 1/800-221-5497 and refer to the style number.

PROTECTION THAT LIVES ON  
**MICROBAN®**

Microban® antimicrobial protection inhibits the growth of stain-causing bacteria, mold and mildew on the shade.



PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/GG  
UL 2818



MIF Seal of Approval



TS = Solar Transmittance  
RS = Solar Reflectance  
AS = Solar Absorptance  
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass  
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally  
Zero-Degree Profile Angle

For additional performance values, test references and technical definitions visit us at [www.phifer.com](http://www.phifer.com).





U12  
Linen/  
Cream


U11  
Linen/  
Burlap

U10  
Linen/  
Topaz

R12  
Linen/  
Cinnamon

R11  
Linen/  
Cranberry

V88  
Linen / Fig

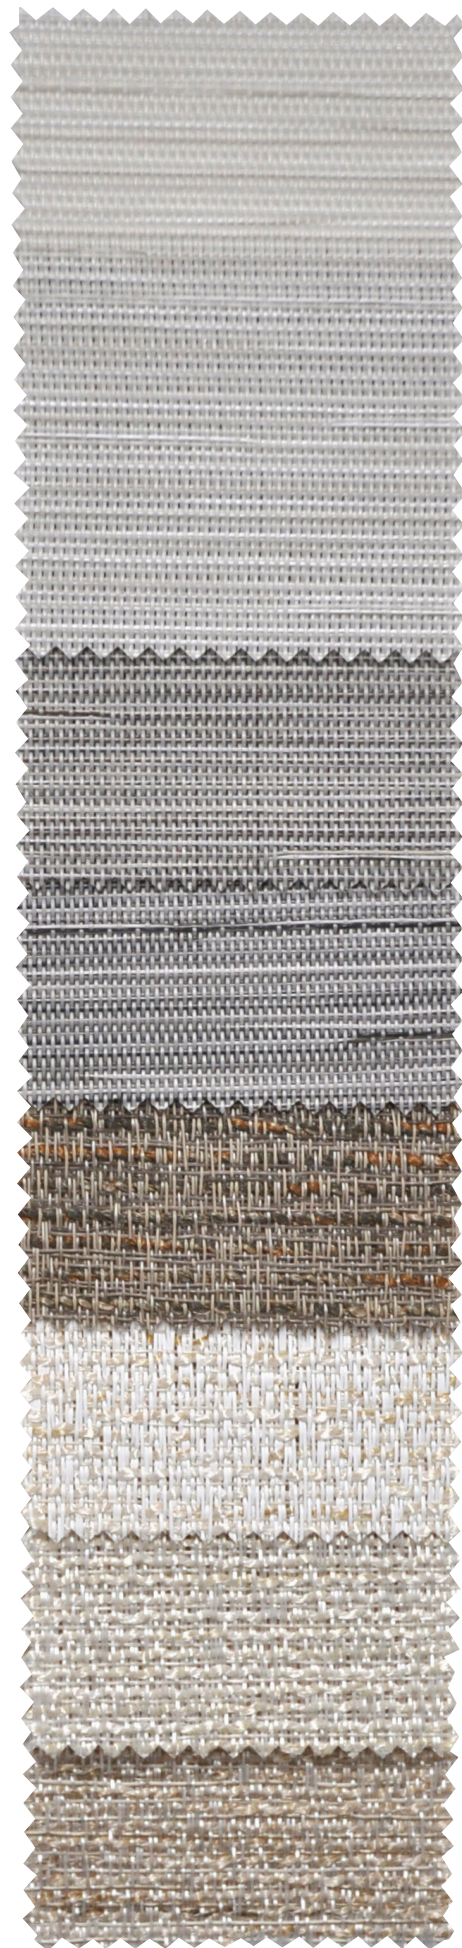

Q63  
Linen / Pearl

Q64  
Linen / Taupe

Q65  
Linen / Clay

R92  
Chenille /  
Driftwood

R89  
Chenille /  
Marshmallow

R90  
Chenille /  
Pearl

R91  
Chenille /  
Honey





R85  
Jute /  
Parchment

R86  
Jute / Flax

R87  
Jute / Latte

R88  
Jute / Coffee

P60  
Bamboo /  
Birch

Q46  
Bamboo /  
Wheat

U16  
Crepe /  
Toasted  
Coconut



Q61  
Bark / Ash

Q50  
Bark / Tiger  
Oak

R95  
Bark / Sienna

Q62  
Bark / Pewter

U29  
Seaglass /  
Crystal

U28  
Seaglass /  
Chardonnay

U24  
Seaglass /  
Silver





Q66  
Metro /  
Platinum

Q43  
Marble /  
Sand

Q53  
Honeycomb /  
Brown Sugar

R96  
Thatch /  
Wheatgrass

Q49  
Rattan /  
Umber

Q47  
Moire /  
Mocha



Q95  
Tweed /  
Buckeye

Q94  
Tweed /  
Oatmeal

R93  
Wicker /  
Straw

Q51  
Wicker /  
Mushroom

P60 Bamboo/Birch

**COMPOSITION:** 28% Polyester, 72%

Vinyl on Polyester

**MESH WEIGHT:** 14.5 oz/yd<sup>2</sup>  
(492 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.038 in.  
(0.97 mm)

**OPENNESS FACTOR:** Approx. 10%

**UV BLOCKAGE:** Approx. 90%

**FIRE CLASSIFICATION:** California US Title 19 (small scale), NFPA 701 TM#1 (small and large scale), BS 5867 Part 2 Type B Performance, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q43 Marble/Sand

**COMPOSITION:** 28% Polyester, 72%

Vinyl on Polyester

**MESH WEIGHT:** 14.5 oz/yd<sup>2</sup>  
(492 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.038 in.  
(0.97 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California US Title 19 (small scale), NFPA 701 TM#1 (small and large scale), BS 5867 Part 2 Type B Performance, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q46 Bamboo/Wheat

**COMPOSITION:** 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

**MESH WEIGHT:** 14.3 oz/yd<sup>2</sup>  
(485 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.044 in.  
(1.12 mm)

**OPENNESS FACTOR:** Approx. 7%

**UV BLOCKAGE:** Approx. 93%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q47 Moire/Mocha

**COMPOSITION:** 26% Polyester, 68%

Vinyl on Polyester, 6% Olefin

**MESH WEIGHT:** 12.3 oz/yd<sup>2</sup>  
(417 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.035 in.  
(0.89 mm)

**OPENNESS FACTOR:** Approx. 7%

**UV BLOCKAGE:** Approx. 93%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q49 Rattan/Umber

**COMPOSITION:** 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

**MESH WEIGHT:** 14.3 oz/yd<sup>2</sup>  
(485 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.044 in.  
(1.12 mm)

**OPENNESS FACTOR:** Approx. 7%

**UV BLOCKAGE:** Approx. 93%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q50 Bark/Tiger Oak

Q51 Wicker/Mushroom

**COMPOSITION:** 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

**MESH WEIGHT:** 14.3 oz/yd<sup>2</sup>  
(485 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.044 in.  
(1.12 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q53 Honeycomb/Brown Sugar

**COMPOSITION:** 26% Polyester, 67%

Vinyl on Polyester, 7% Olefin

**MESH WEIGHT:** 13.0 oz/yd<sup>2</sup>  
(441 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.037 in.  
(0.94 mm)

**OPENNESS FACTOR:** Approx. 10%

**UV BLOCKAGE:** Approx. 90%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q61 Bark/Ash

**COMPOSITION:** 72% Vinyl on

Polyester, 28% Polyester

**MESH WEIGHT:** 16.1 oz/yd<sup>2</sup>  
(546 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.043 in.  
(1.09 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q62 Bark/Pewter

**COMPOSITION:** 72% Vinyl on

Polyester, 28% Polyester

**MESH WEIGHT:** 15.3 oz/yd<sup>2</sup> (519 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.042 in.  
(1.07 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q63 Linen/Pearl

**COMPOSITION:** 72% Vinyl on

Polyester, 28% Polyester

**MESH WEIGHT:** 15.4 oz/yd<sup>2</sup>  
(522 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.035 in.  
(0.89 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q64 Linen/Taupe

**COMPOSITION:** 72% Vinyl on

Polyester, 28% Polyester

**MESH WEIGHT:** 16.3 oz/yd<sup>2</sup>  
(553 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.035 in.  
(0.89 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q65 Linen/Clay

**COMPOSITION:** 72% Vinyl on Polyester, 28% Polyester

**MESH WEIGHT:** 15.5 oz/yd<sup>2</sup> (526 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.035 in.  
(0.89 mm)

**OPENNESS FACTOR:** Approx. 7%

**UV BLOCKAGE:** Approx. 93%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q66 Metro/Platinum

**COMPOSITION:** 67% Vinyl on

Polyester, 26% Polyester, 7% Olefin

**MESH WEIGHT:** 12.5 oz/yd<sup>2</sup>  
(424 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.030 in.  
(0.76 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q94 Tweed/Oatmeal

**COMPOSITION:** 36% Polyester, 64%

Vinyl on Polyester

**MESH WEIGHT:** 13.7 oz/yd<sup>2</sup>  
(465 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.036 in.  
(0.91 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q95 Tweed/Buckeye

**COMPOSITION:** 37% Polyester, 63%

Vinyl on Polyester

**MESH WEIGHT:** 13.6 oz/yd<sup>2</sup>  
(461 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.038 in.  
(0.97 mm)

**OPENNESS FACTOR:** Approx. 5%

**UV BLOCKAGE:** Approx. 95%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q96 Thatch/Wheatgrass

**COMPOSITION:** 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

**MESH WEIGHT:** 13.5 oz/yd<sup>2</sup>  
(458 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.037 in.  
(.094 mm)

**OPENNESS FACTOR:** Approx. 7%

**UV BLOCKAGE:** Approx. 93%

**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)



R11 Linen/Cranberry  
R12 Linen/Cinnamon  
**COMPOSITION:** 45% Polyester, 55% Vinyl on Polyester  
**MESH WEIGHT:** 14.1 oz/yd<sup>2</sup> (478 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.40 in. (1.02 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R85 Jute/Parchment  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 17.2 oz/yd<sup>2</sup> (584 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.040 in. (1.02 mm)  
**OPENNESS FACTOR:** Approx. 1%  
**UV BLOCKAGE:** Approx. 99%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), ASTM E 84 (Class 1) and IBC Section 803.1.1 (Class A Rating)

R86 Jute/Flax  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 16.70 oz/yd<sup>2</sup> (566 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.039 in. (0.99 mm)  
**OPENNESS FACTOR:** Approx. 1%  
**UV BLOCKAGE:** Approx. 99%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), ASTM E 84 (Class 1) and IBC Section 803.1.1 (Class A Rating)

R87 Jute/Latte  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 16.62 oz/yd<sup>2</sup> (564 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** .039 in. (0.99 mm)  
**OPENNESS FACTOR:** Approx. 1%  
**UV BLOCKAGE:** Approx. 99%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R88 Jute/Coffee  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 16.88 oz/yd<sup>2</sup> (572 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.039 in. (0.99 mm)  
**OPENNESS FACTOR:** Approx. 1%  
**UV BLOCKAGE:** Approx. 99%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R89 Chenille/Marshmallow  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 16.43 oz/yd<sup>2</sup> (557 g/m<sup>2</sup>)

**FABRIC THICKNESS:** 0.048 in. (1.22 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R90 Chenille/Pearl  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 15.6 oz/yd<sup>2</sup> (529 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.044 in. (1.12 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R91 Chenille/Honey  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 16.34 oz/yd<sup>2</sup> (554 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.045 in. (1.14 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R92 Chenille/Driftwood  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 15.0 oz/yd<sup>2</sup> (509 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.047 in. (1.19 mm)  
**OPENNESS FACTOR:** Approx. 5%  
**UV BLOCKAGE:** Approx. 95%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R93 Wicker/Straw  
**COMPOSITION:** 49% Polyester, 51% Vinyl on Polyester  
**MESH WEIGHT:** 15.68 oz/yd<sup>2</sup> (532 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.045 in. (1.14 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R95 Bark/Sienna  
**COMPOSITION:** 43% Polyester, 57% Vinyl on Polyester  
**MESH WEIGHT:** 16.26 oz/yd<sup>2</sup> (551 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.054 in. (1.37 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California

Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U10 Linen/Topaz  
V88 Linen/Fig  
**COMPOSITION:** 45% Polyester, 55% Vinyl on Polyester  
**MESH WEIGHT:** 14.1 oz/yd<sup>2</sup> (478 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.040 in. (1.02 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U11 Linen/Burlap  
**COMPOSITION:** 43% Polyester, 57% Vinyl on Polyester  
**MESH WEIGHT:** 16.1 oz/yd<sup>2</sup> (546 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.046 in. (1.17 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U12 Linen/Cream  
**COMPOSITION:** 43% Polyester, 57% Vinyl on Polyester  
**MESH WEIGHT:** 16.1 oz/yd<sup>2</sup> (546 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.052 in. (1.32 mm)  
**OPENNESS FACTOR:** Approx. 3%  
**UV BLOCKAGE:** Approx. 97%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U16 Crepe/Toasted Coconut  
**COMPOSITION:** 28% Polyester, 72% Vinyl on Polyester  
**MESH WEIGHT:** 14.3 oz/yd<sup>2</sup> (485 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.039 in. (0.99 mm)  
**OPENNESS FACTOR:** Approx. 10%  
**UV BLOCKAGE:** Approx. 90%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U24 Seaglass/Silver  
U28 Seaglass/Chardonnay  
U29 Seaglass/Crystal  
**COMPOSITION:** 28% Polyester, 72% Vinyl on Polyester  
**MESH WEIGHT:** 14.3 oz/yd<sup>2</sup> (485 g/m<sup>2</sup>)  
**FABRIC THICKNESS:** 0.039 in. (0.99 mm)  
**OPENNESS FACTOR:** Approx. 10%  
**UV BLOCKAGE:** Approx. 90%  
**FIRE CLASSIFICATION:** California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

# STYLE 5000 SPECIFICATIONS

SheerWeave Style 5000 features fabrics that combine textured yarns with traditional patterns. With a color palette of hushed naturals and rich earth tones, this collection offers a range of classic options designed to suit any style of decor or personal preference. Style 5000 can also be used in exterior roller shades.

<b>FIRE CLASSIFICATION</b>	See individual pattern certifications	
<b>BACTERIA AND FUNGAL RESISTANCE</b>	ASTM E 2180 includes Microban antimicrobial additives	ASTM G21
<b>ENVIRONMENTAL CERTIFICATION</b>	GREENGUARD Certified to these standards for low chemical emissions into indoor air during product usage	GREENGUARD Gold
<b>LEAD FREE</b>	RoHS/Directive 2002/95/EC ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101	REACH (EC 1907/2006) compliant
<b>WARRANTY</b>	10-year interior	5-year exterior
<b>ACOUSTICAL PERFORMANCE</b>	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a	
<b>UV PROTECTION</b>	Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes	

## STYLE 5000

---

<b>WIDTHS</b>	74" and 98" 187.96 cm and 248.9 cm
<b>ROLL LENGTH</b>	30 Linear Yards 27.4 m
<b>ACOUSTICAL VALUE</b>	NRC .15 / SAA .16

For additional specification information, please see individual pattern listings.

**PHIFER**  
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA  
Phone: 205.345.2120 • FAX: 205.391.0799  
Toll Free USA/Canada: 1.800.221.5497  
www.phifer.com • ISO Registered



® SheerWeave is a registered trademark of PHIFER INCORPORATED.  
® MICROBAN is a registered trademark of Microban Products Company.  
™ UL, the UL logos and the UL mark are trademarks of UL LLC.  
Cover photo courtesy of WINDOW INTERIORS, Altamonte Springs, Florida, USA.  
© PHIFER INCORPORATED V18 3033841