




INFINITY₂[®]
SUSTAINABLE FABRIC


WEAVING
EXCELLENCE
WITH
INNOVATION

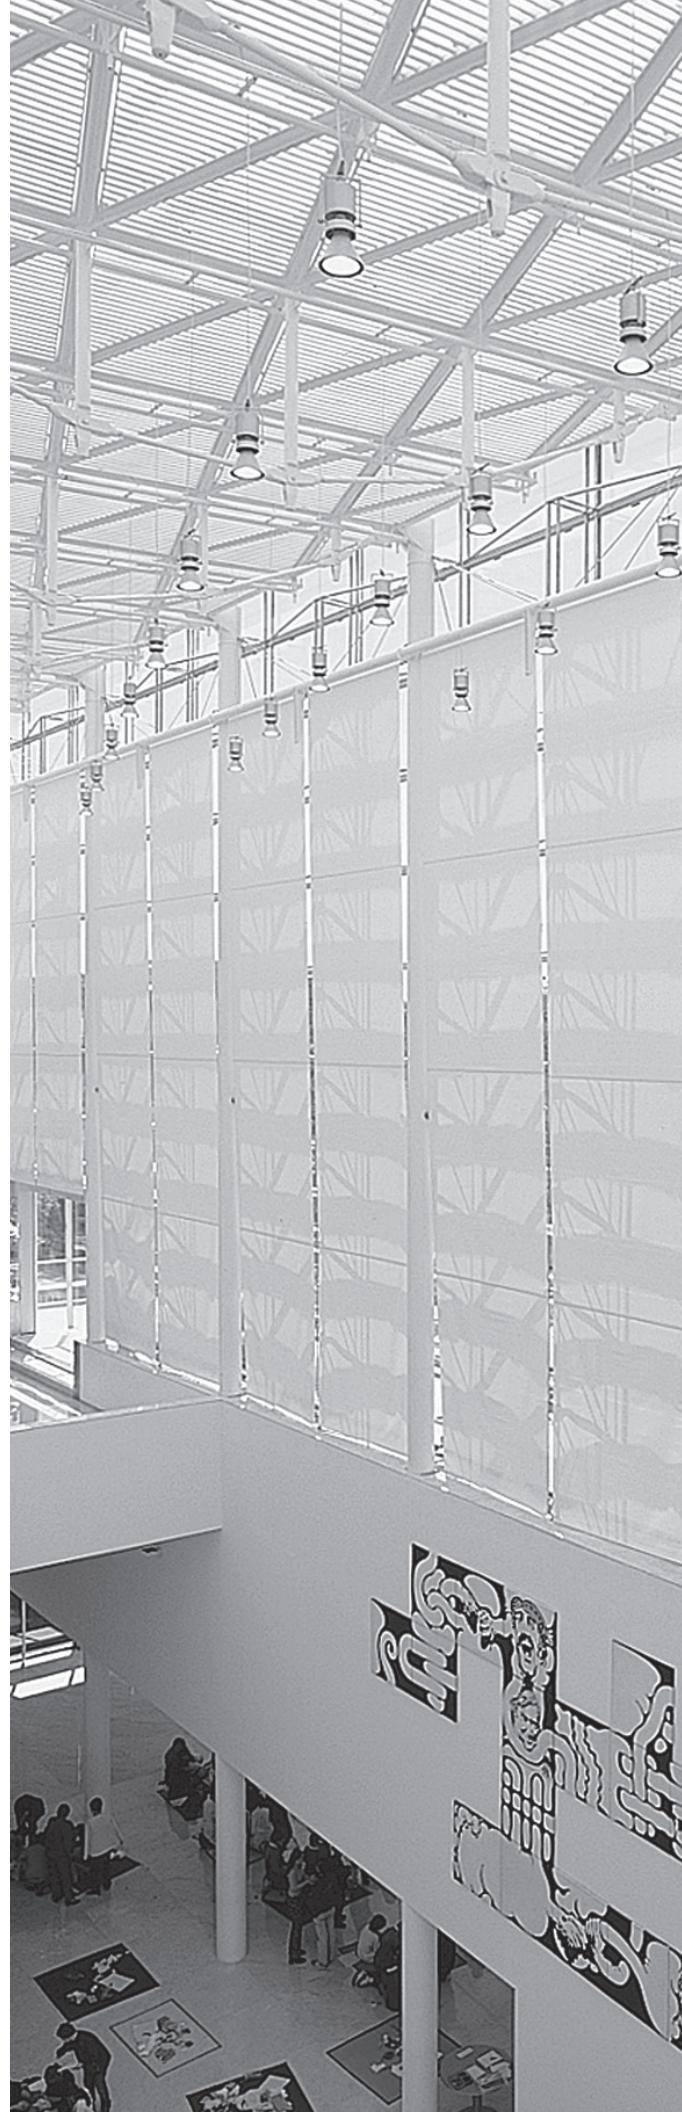


PG1 Cotton




PG2 Almond

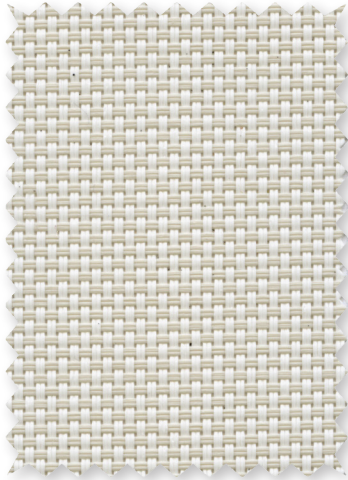

PG3 Wheat

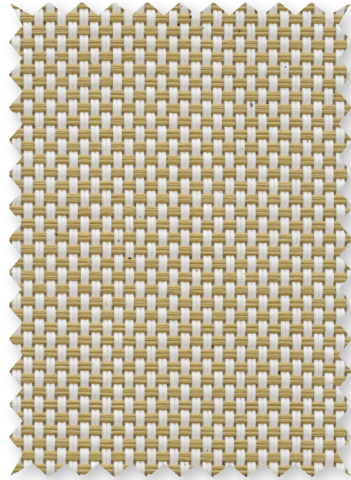


PG4 Stone

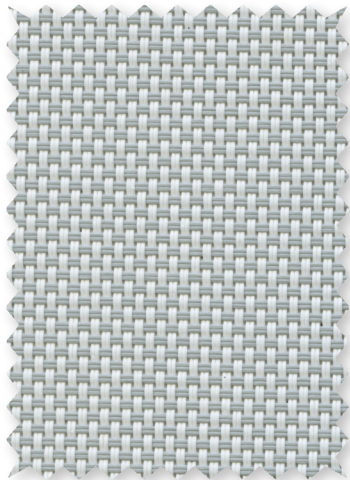

QG1 Barley




VG1 Nickel

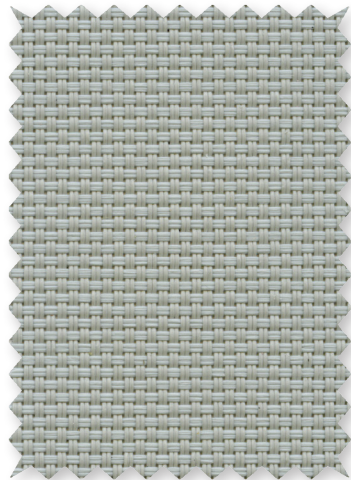


VG2 Midnight



VG3 Bark

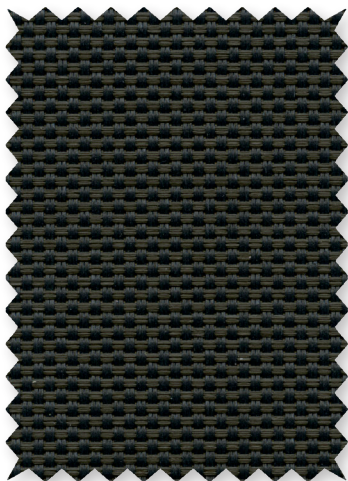

VG4 Slate

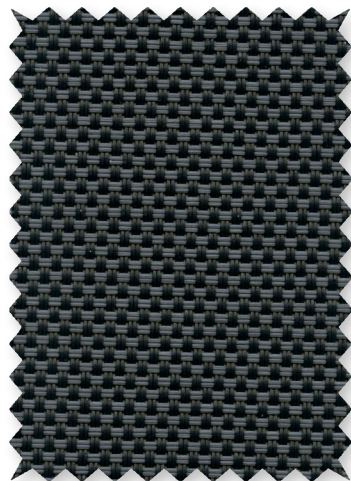

Benefits of Infinity₂ include:

- 100% recyclable with active Reclamation Program that captures scrap from post-industrial (pre-consumer) and post-consumer sources
- Produced from 100% post-industrial (pre-consumer) recycled content
- Repeat recyclability for continued sustainability
- PVC-free
- Phthalate-free
- Lead-free
- Every component of this TPO compound is heat and chemically stable.
- Resistant to microbial and fungal growth
- Durable and washable

Code	Color	SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
		TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
INFINITY₂ - 1%							
PG1	Cotton	20	68	12	18	0.29	0.22
PG2	Almond	15	61	24	12	0.31	0.23
PG3	Wheat	12	54	34	10	0.35	0.25
PG4	Stone	13	55	32	11	0.35	0.24
QG1	Barley	18	52	30	15	0.37	0.26
VG1	Nickel	8	37	55	7	0.42	0.30
VG2	Midnight	1	63	93	2	0.59	0.37
VG3	Bark	3	7	90	5	0.58	0.37
VG4	Slate	2	9	89	4	0.57	0.36
INFINITY₂ - 3%							
PG1	Cotton	20	70	10	19	0.28	0.21
PG2	Almond	17	61	22	15	0.32	0.23
PG3	Wheat	12	52	36	9	0.37	0.25
PG4	Stone	12	52	36	11	0.37	0.25
QG1	Barley	16	53	31	14	0.37	0.25
VG1	Nickel	9	36	55	8	0.44	0.30
VG2	Midnight	3	6	91	5	0.59	0.37
VG3	Bark	3	7	90	4	0.58	0.37
VG4	Slate	3	10	87	5	0.57	0.36
INFINITY₂ - 5%							
PG1	Cotton	23	68	9	22	0.30	0.22
PG2	Almond	20	60	20	18	0.33	0.23
PG3	Wheat	14	51	35	12	0.37	0.26
PG4	Stone	15	52	33	14	0.37	0.25
QG1	Barley	19	51	30	17	0.38	0.26
VG1	Nickel	10	34	56	11	0.45	0.30
VG2	Midnight	5	6	89	8	0.60	0.37
VG3	Bark	4	7	89	6	0.59	0.37
VG4	Slate	5	9	86	7	0.58	0.36



The Next Generation of Sustainable Fabric



PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



MIF Seal of Approval



TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorption
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally
Zero-Degree Profile Angle

For additional performance values, test references and technical definitions visit us at www.phifer.com.

INFINITY₂ SPECIFICATIONS

SheerWeave Infinity₂ sustainable sun control fabrics are eco-friendly full basketweaves designed to meet the most stringent environmental design standards. With 100% recycled content, 100% recyclable, and a PVC-free composition, Infinity₂ fabrics offer the same solar heat and glare control properties as traditional SheerWeave fabrics for conserving energy, harnessing natural light and maintaining interior comfort levels.

FIRE CLASSIFICATION	NFPA 701 TM#1 (small scale) CAN/ULC-S 109-03 (large scale) CAN/CGSB2-4.162-M80	NFPA 101 (Class A Rating) IBC Section 803.1.1 (Class A Rating) BS 5867 Part 2 Type B Performance
BACTERIA AND FUNGAL RESISTANCE	ASTM E 2180	ASTM G21
ENVIRONMENTAL CERTIFICATION	GREENGUARD Certified to these standards for low chemical emissions into indoor air during product usage	GREENGUARD Gold
LEAD FREE	RoHS/Directive 2002/95/EC ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101	REACH (EC 1907/2006) compliant
WARRANTY	5-year interior	
ACOUSTICAL PERFORMANCE	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a	
UV PROTECTION	Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes	

STYLE	1%	3%	5%
WIDTHS	63" and 98" 160.0 cm and 248.9 cm	63" and 98" 160.0 cm and 248.9 cm	63" and 98" 160.0 cm and 248.9 cm
ROLL LENGTH	30 Linear Yards 27.4 m	30 Linear Yards 27.4 m	30 Linear Yards 27.4 m
COMPOSITION	100% TPO (Thermoplastic Olefin) 20% TPO fiber yarn 80% TPO TPO coating on TPO yarn	100% TPO (Thermoplastic Olefin) 20% TPO fiber yarn 80% TPO TPO coating on TPO yarn	100% TPO (Thermoplastic Olefin) 20% TPO fiber yarn 80% TPO TPO coating on TPO yarn
MESH WEIGHT	14.63 oz/yd ² 496.03 g/m ²	13.69 oz/yd ² 464.17 g/m ²	12.82 oz/yd ² 434.67 g/m ²
FABRIC THICKNESS	0.033 in 0.838 mm	0.031 in 0.787 mm	0.030 in 0.762 mm
OPENNESS FACTOR	Approximately 1%	Approximately 3%	Approximately 5%
UV BLOCKAGE	Approximately 99%	Approximately 97%	Approximately 95%
ACOUSTICAL VALUE	NRC .20 / SAA .23	NRC .20 / SAA .19	NRC .10 / SAA .11

PHIFER
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA
Phone: 205.345.2120 • FAX: 205.391.0799
Toll Free USA/Canada: 1.800.221.5497
www.phifer.com • ISO Registered



© SheerWeave and SheerWeave Infinity are registered trademark of PHIFER INCORPORATED.
™ UL, the UL logos and the UL mark are trademarks of UL LLC.
Cover photo courtesy of Rielamericano, Buenos Aires, Argentina.
© PHIFER INCORPORATED V17 3033845