

SIGNATURE SERIES

BLACKOUT



 ROLL A SHADE

SIGNATURE SERIES

BLACKOUT




WHITE




IVORY




LINEN

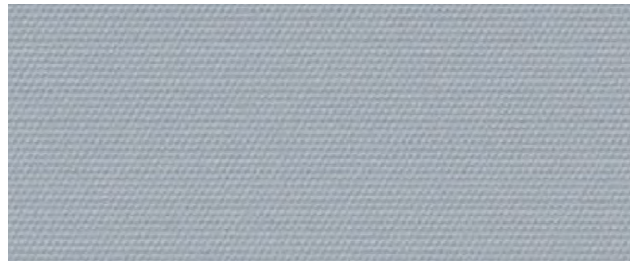

LIGHT GREY

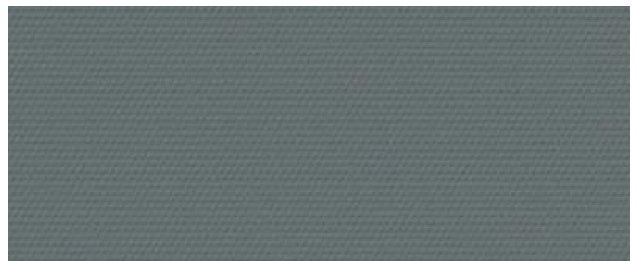

SLATE

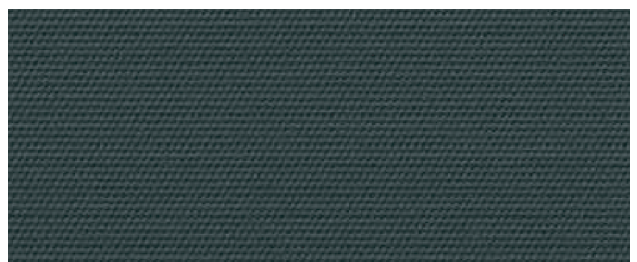

ECLIPSE

***PERFORMANCE EVALUATIONS
CONDUCTED IN ACCORDANCE
TO REQUIREMENTS**

TS = Solar Transmittance
RS = Solar Reflectance

AS = Solar Absorptance
TV = Visual Transmittance

1/8 CL = 1/8" Clear Glass
1/4 CL = 1/4" Clear Glass

1/4 HA = 1/4" Heat Absorbing Glass
*SIDE: FRONT (BACK)

SIGNATURE SERIES BLACKOUT

OPENNESS FACTOR

Blackout

WEIGHT

12.09oz/sq yd. (410gsm) (+/- 5%)

THICKNESS

0.017" (0.45mm) +/-5%

WIDTHS

98.4" (250cm), 118" (300cm)

STANDARD ROLL LENGTH

30 yds (28m)

ACOUSTIC

NRC 0.00 SAA 0.03

CO. NO.	COLOR	TS	RS	AS	TV	RV	AV	TUV	SC SINGLE GLASS			SC INSULATING GLASS		
									1/8"CL	1/4" CL	1/4" HA	1/2"CL	1"CL	1" HA
100	White	0	66	34	0	77	23	0	0.29	0.30	0.30	0.28	0.29	0.24
101	Ivory	0	68	32	0	79	21	0	0.28	0.28	0.29	0.27	0.28	0.23
102	Linen	0	67	33	0	78	22	0	0.28	0.29	0.29	0.28	0.29	0.23
103	Light Grey	0	66	34	0	77	23	0	0.29	0.30	0.30	0.28	0.29	0.24
104	Slate	0	70	30	0	80	20	0	0.26	0.27	0.28	0.26	0.27	0.23
105	Eclipse	0	68	32	0	79	21	0	0.28	0.28	0.29	0.27	0.28	0.23

FABRICATION METHODS

Cutting: Cold, Ultrasonic, Crush or Laser Cut
Welding: Thermal, High-Frequency, or sewing

ACOUSTICAL PERFORMANCE

ASTM C423

ENVIRONMENTAL

Greenguard, GreenGuard Gold, RoHS-Lead Free

CARE & CLEANING

Dust removal with vacuum, compressed air or soft brushing.
Do not scrub. Wipe clean with sponge using clean water.

COMPOSITION

100% Polyester / Acrylic Foam Back Coating

FIRE CLASSIFICATION

NFPA701-2019 TM#1

RAIL ROAD

Not Recommended

COLAR FASTNESS TO LIGHT

Grade ≥ 6, ISO 105-B02:2014 Method 3





 **ROLL A SHADE**
AN **MDC** INTERIOR SOLUTIONS COMPANY

SSFCV.1