



SIGNATURE SERIES

INTERIOR

Please check specifications for color availability as not all colors are available in all openness factors.

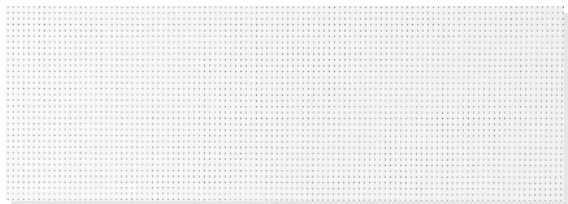

Brite White | White 1%, 3%, 5%, 10%

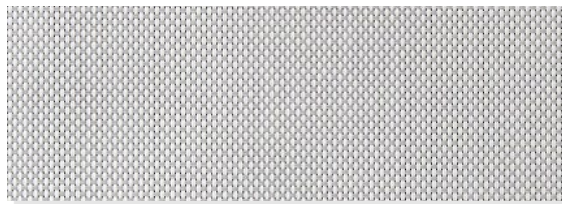


White | Gray 1%, 3%, 5%, 10%



White | Linen 1%, 3%, 5%, 10%



Bone | Bone 1%, 3%

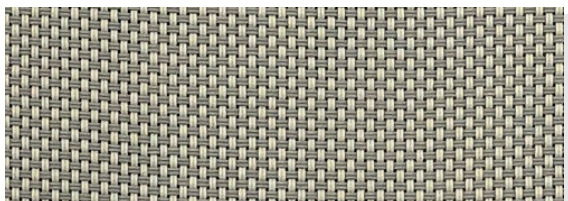

Beige | Gray 1%, 3%, 5%



Gray | Gray 1%, 3%, 5%




Black | Gray 1%, 3%, 5%



Black | Dark Gray 1%, 3%, 5%



Charcoal | Bronze 1%, 3%, 5%

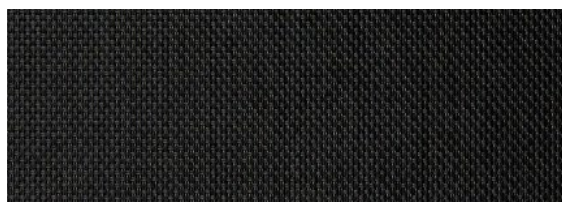

Black | Black 1%, 3%, 5%

SIGNATURE SERIES 1%

OPENNESS FACTOR 1%	COLOR NO.	COLOR	SOLAR OPTICAL PROPERTIES*				SHADING COEFFICIENT		
			TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
WEIGHT 14.57oz/sq yd. (494g/sqm) (+/- 5%)	001	White White	20	72	8	17	0.30	0.31	0.30
	003	White Gray	10	52	38	6	0.42	0.41	0.36
	016	White Linen	14	60	26	9	0.37	0.37	0.34
THICKNESS 0.025 in (0.63mm) +/-5%	914	Black Black	1	4	95	2	0.73	0.69	0.50
	1241	Charcoal Bronze	2	8	90	2	0.71	0.67	0.49
WIDTHS 78.7" (200cm), 98.4" (250cm), 118" (300cm)	906	Black Dark Gray	1	11	88	2	0.68	0.65	0.48
	404	Bone Bone	12	55	33	6	0.40	0.40	0.35
STANDARD ROLL LENGTH 33 lyds (30m)	203	Beige Gray	10	41	49	6	0.50	0.48	0.39
	303	Gray Gray	5	32	63	3	0.55	0.53	0.42
	903	Black Gray	2	15	83	2	0.66	0.62	0.47

SIGNATURE SERIES 3%

OPENNESS FACTOR 3%	COLOR NO.	COLOR	SOLAR OPTICAL PROPERTIES*				SHADING COEFFICIENT		
			TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
WEIGHT 13.93oz/sq yd. (472g/sqm) (+/- 5%)	001	White White	22	70	8	19	0.32	0.32	0.31
	003	White Gray	12	49	39	9	0.44	0.43	0.37
	016	White Linen	17	57	26	13	0.40	0.40	0.35
THICKNESS 0.024IN (0.61MM) +/-5%	914	Black Black	3	4	93	5	0.73	0.69	0.51
	1241	Charcoal Bronze	5	9	86	7	0.70	0.67	0.49
WIDTHS 78.7" (200CM), 98.4" (250CM), 118" (300CM)	906	Black Dark Gray	4	12	84	5	0.69	0.65	0.48
	404	Bone Bone	14	54	32	8	0.41	0.41	0.36
STANDARD ROLL LENGTH 33 lyds (30m)	203	Beige Gray	13	39	48	9	0.52	0.50	0.40
	303	Gray Gray	7	33	60	4	0.55	0.52	0.42
	903	Black Gray	5	18	78	4	0.65	0.61	0.47

SIGNATURE SERIES 5%

OPENNESS FACTOR 5%	COLOR NO.	COLOR	SOLAR OPTICAL PROPERTIES*				SHADING COEFFICIENT		
			TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
WEIGHT 12.71oz/sq yd. (431g/sqm) (+/- 5%)	001	White White	25	68	7	22	0.35	0.35	0.37
	003	White Gray	14	49	37	11	0.45	0.44	0.35
	016	White Linen	19	57	24	15	0.41	0.40	0.51
THICKNESS 0.023IN (0.60MM) +/-5%	914	Black Black	5	4	91	8	0.74	0.70	0.50
	1241	Charcoal Bronze	7	8	85	10	0.71	0.68	0.33
WIDTHS 78.7" (200CM), 98.4" (250CM), 118" (300CM)	906	Black Dark Gray	5	11	84	5	0.70	0.66	0.49
	203	Beige Gray	15	40	45	11	0.52	0.50	0.41
STANDARD ROLL LENGTH 33 lyds (30m)	303	Gray Gray	11	32	57	8	0.57	0.54	0.43
	903	Black Gray	6	17	77	5	0.65	0.62	0.47

SIGNATURE SERIES 10%

OPENNESS FACTOR 10%	COLOR NO.	COLOR	SOLAR OPTICAL PROPERTIES*				SHADING COEFFICIENT		
			TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
WEIGHT 11.65oz/sq yd. (395g/sqm) (+/- 5%)	001	White White	29	63	8	25	0.39	0.38	0.35
	003	White Gray	18	42	40	19	0.51	0.49	0.40
	016	White Linen	22	55	23	17	0.43	0.42	0.36

THICKNESS
0.022IN (0.56MM) +/-5%

WIDTHS
78.7" (200CM),
98.4" (250CM), 118" (300CM)

STANDARD ROLL LENGTH
33 lyds (30m)

*Performance evaluations
conducted in accordance
to requirements

TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance

1/8CL = 1/8" Clear Glass
1/4CL = 1/8" Clear Glass
1/4HA = 1/4" Heat Absorbing Glass

The solar optical properties are used to calculate the shading coefficient. The shading coefficient represents the percentage of solar gain that is transmitted to the interior through the glass and shading system. Darker colors provide maximum glare reduction and visibility. For complete technical information, current test results, performance specifications and larger samples, contact Roll-A-Shade® Incorporated.

SPECIFICATIONS

FIRE CLASSIFICATION
NFPA 701
BACTERIA AND FUNGAL RESISTANCE
ASTM G21
ENVIRONMENTAL CERTIFICATIONS
GREENGUARD, GREENGUARD Gold,
REACH, and RoHS - Lead Free
COMPOSITION
24% Polyester / 76% PVC




Roll-A-Shade® logo is a registered trademark of Roll-A-Shade® Inc.
GREENGUARD is a registered trademark of GREENGUARD Environmental Institute


rollashade.com
1.888.245.5077
©2022 RASISCOVER.4

SIGNATURE SERIES


OPACITY WINDOWS

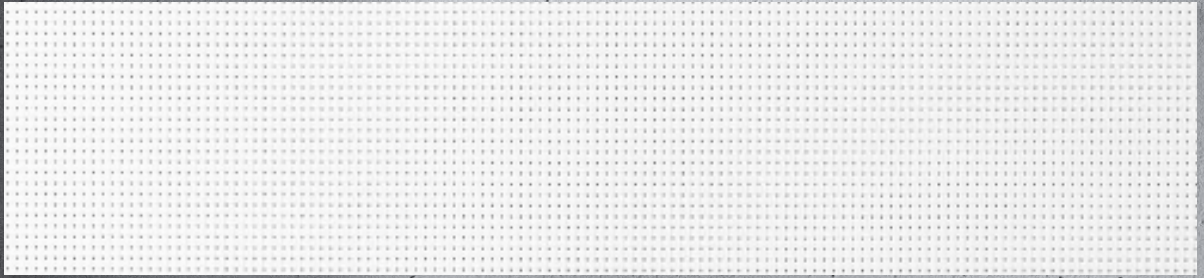


Brite White | White 1%

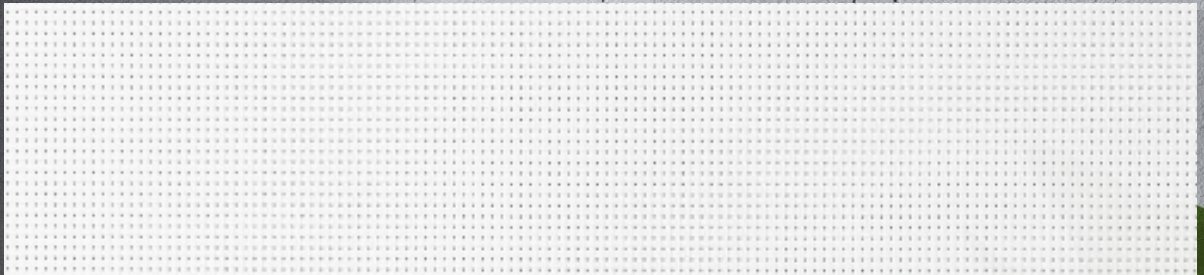

Brite White | White 3%

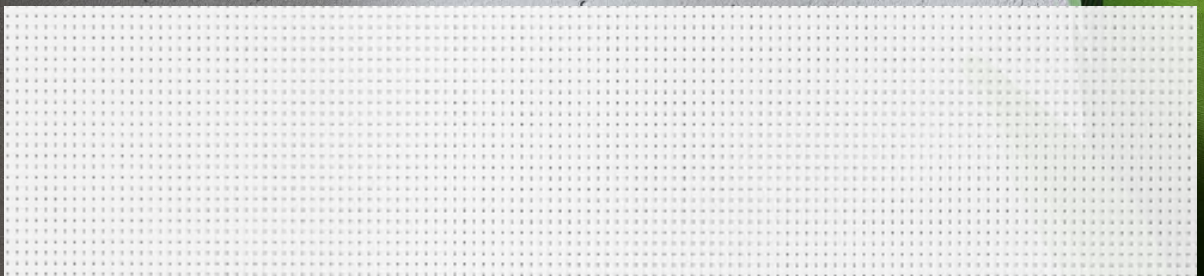

Brite White | White 5%

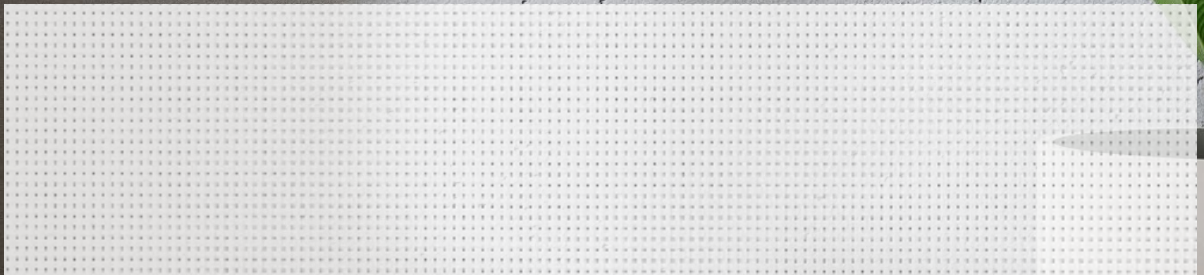

Brite White | White 10%